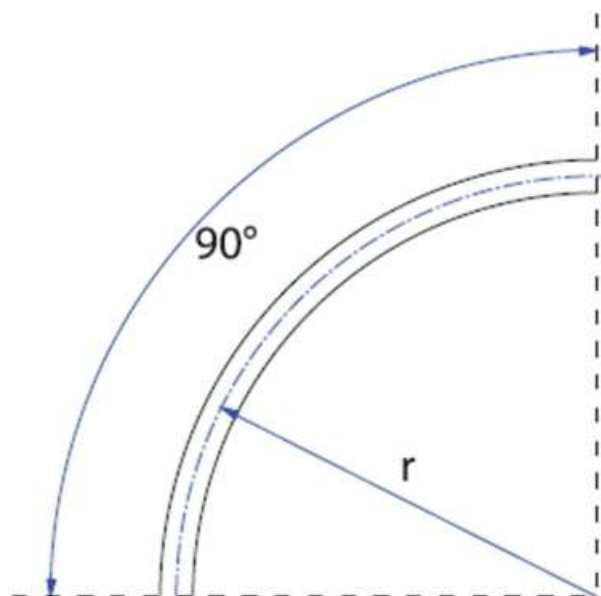


C-track 30x32 mm

Material: Galvanised steel

Part no.	Radius, mm	Arc length, mm	Max. trolley spacing, mm	Max. trolley length, mm	Weight, kg
11-910	1000	1570	700	160	2,45
11-912	1200	1885	840	160	2,95
11-914	1400	2200	980	200	3,45
11-916	1600	2510	1120	200	3,90
11-918	1800	2830	1260	280	4,40
11-920	2000	3140	1400	280	4,90
11-922	2200	3455	1540	280	5,40
11-924	2400	3770	1680	320	5,90
11-926	2600	4080	1820	320	6,40
11-928	2800	4400	1960	320	6,90
11-930	3000	4710	2100	320	7,35
11-932	3200	5025	2240	320	7,85
11-934	3400	5340	2380	320	8,35
11-936	3600	5650	2520	320	9,10
11-938	3800	5970	2660	320	9,60
11-940	4000	6280	2800	320	10,10
11-942	4200	6595	2940	320	10,60
11-944	4400	6910	3080	320	11,10
11-946	4600	7220	3220	320	11,60
11-948	4800	7540	3360	320	12,10
11-950	5000	7850	3500	320	12,55


Smaller curves on request

Curves with a radius above 3400 mm require one additional splice joint 11-810.

C-track 40x40 mm

Material: Galvanised steel

Part no.	Radius, mm	Arc length, mm	Max. trolley spacing, mm	Max. trolley length, mm	Weight, kg
11-550	1000	1570	700	100	3,90
11-552	1200	1885	840	125	4,70
11-554	1400	2200	980	160	5,50
11-556	1600	2510	1120	160	6,30
11-558	1800	2830	1260	200	7,10
11-560	2000	3140	1400	200	7,90
11-562	2200	3455	1540	250	8,60
11-564	2400	3770	1680	250	9,40
11-566	2600	4080	1820	280	10,20
11-568	2800	4400	1960	320	11,00
11-570	3000	4710	2100	320	11,80
11-572	3200	5025	2240	360	12,60
11-574	3400	5340	2380	360	13,40
11-576	3600	5650	2520	400	14,00
11-578	3800	5970	2660	400	14,90
11-580	4000	6280	2800	450	15,70
11-582	4200	6595	2940	450	16,50
11-584	4400	6910	3080	450	17,30
11-586	4600	7220	3220	500	18,10
11-588	4800	7540	3360	500	18,90
11-590	5000	7850	3500	500	19,60

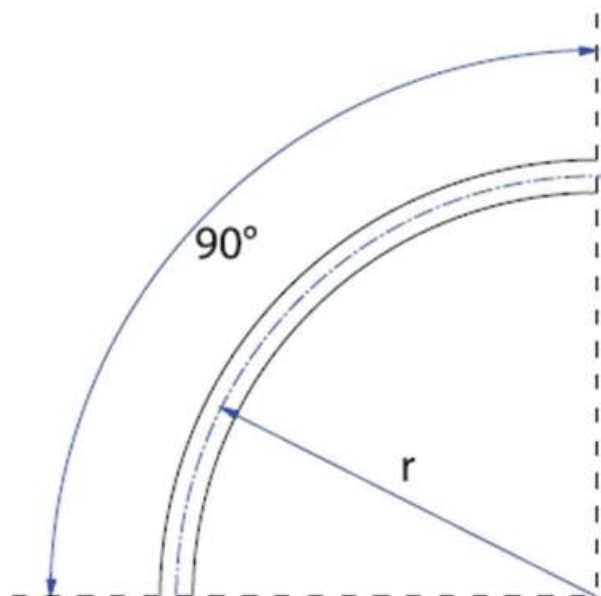Smaller curves on request

Curves with a radius above 3400 mm require one additional splice joint 11-812.